





GE
Lighting

11468 - 50PAR36WFL/4

GE PAR36 - Wide Flood

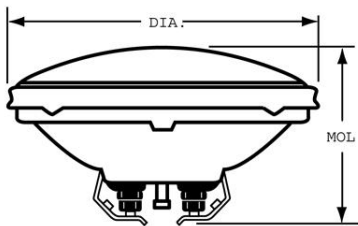

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	4000.0 h
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	300.0
Beam Spread - Horizontal	48.0 - 10.0 °/37.0 - 50.0 °
Beam Spread - Vertical	41.0 - 10.0 °/27.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	720.0
Max. Beam Candlepower (MBCP) (MAX)	720.0
Nominal Initial Lumens per Watt (NOM)	6.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	11468
Description	50PAR36WFL/4
Standard Package	Case
Standard Package GTIN	10043168114681
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168114684