



GE
Lighting

14553 - 25PAR36

GE PAR36 - Very Narrow Spot

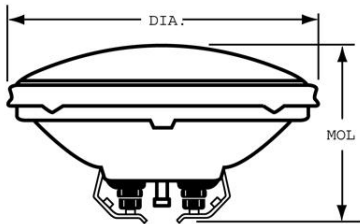


Photo
Not Available

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	1000.0 h
Primary Application	Very Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	130.0
Center Beam Candlepower (CBCP) (NOM)	19700.0
Color Temperature (NOM)	3000.0 K
Max. Beam Candlepower (MBCP) (MAX)	19700.0
Nominal Initial Lumens per Watt (NOM)	5.2

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Voltage (NOM)	6.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	14553
Description	25PAR36
Standard Package	Case
Standard Package GTIN	10043168145531
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168145534

NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light