





GE
Lighting

14554 - 25PAR36/NSP

GE PAR36 - Narrow Spot

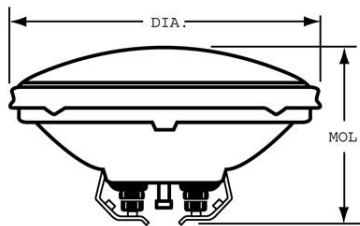

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	2000.0 h
Primary Application	Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	150.0
Beam Spread (NOM)	9.0 °
Beam Spread - Horizontal	9.0 - 50.0 °
Beam Spread - Vertical	9.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	2600.0
Max. Beam Candlepower (MBCP) (MAX)	2600.0
Nominal Initial Lumens per Watt (NOM)	6.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	25.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	14554
Description	25PAR36/NSP
Standard Package	Case
Standard Package GTIN	00043168145541
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168906449

NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light