



GE  
Lighting

## 14556 - 25 PAR36 VWFL

GE PAR36 - Wide Flood

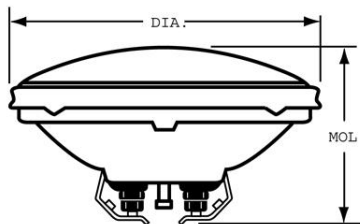


Photo  
Not Available

### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR36             |
| Base                | Screw Terminals   |
| Filament            | C-6               |
| Rated Life (NOM)    | 2000.0 h          |
| Primary Application | Wide Flood        |

### PHOTOMETRIC CHARACTERISTICS

|                                       |               |
|---------------------------------------|---------------|
| Initial Lumens (NOM)                  | 150.0         |
| Beam Spread (NOM)                     | 55.0 °        |
| Beam Spread - Horizontal              | 55.0 - 50.0 ° |
| Beam Spread - Vertical                | 55.0 - 50.0 ° |
| Center Beam Candlepower (CBCP) (NOM)  | 160.0         |
| Max. Beam Candlepower (MBCP) (MAX)    | 160.0         |
| Nominal Initial Lumens per Watt (NOM) | 6.0           |

### ELECTRICAL CHARACTERISTICS

|               |      |
|---------------|------|
| Wattage (NOM) | 25.0 |
| Voltage (NOM) | 12.0 |

### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 2.750 in(69.8 mm)  |
| Bulb Diameter (DIA) (NOM)          | 4.500 in(114.3 mm) |

### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 14556          |
| Description                      | 25 PAR36 VWFL  |
| Standard Package                 | Case           |
| Standard Package GTIN            | 10043168145562 |
| Standard Package Quantity        | 12             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 12             |
| UPC                              | 043168145565   |

### NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light