
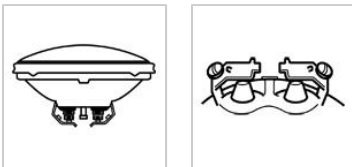


## 19877 - 35PAR36/H/FL30

### GE PAR36 - Wide Flood

- Standard Halogen - Crisp, white light

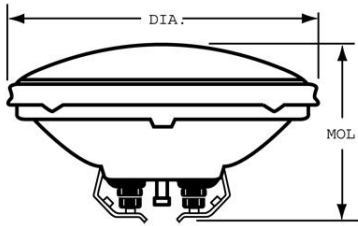

#### CAUTIONS & WARNINGS

##### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

##### Warning

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Do not exceed 110% of rated voltage.
  - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.

#### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	4000.0 h
Primary Application	Wide Flood

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	250.0
Beam Spread (NOM)	30.0 °
Beam Spread - Horizontal	40.0 - 10.0 °
Beam Spread - Vertical	34.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	900.0
Color Temperature (NOM)	3050.0 K
Max. Beam Candlepower (MBCP) (MAX)	900.0
Nominal Initial Lumens per Watt (NOM)	7.142857

#### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	35.0
Voltage (NOM)	120.0

#### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

#### PRODUCT INFORMATION

Product Code	19877
Description	35PAR36/H/FL30
Standard Package	Case
Standard Package GTIN	00043168198776
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168970297