





GE
Lighting

19024 - 120 PAR56 MFL

GE PAR56 - Medium Flood

This product is no longer manufactured.

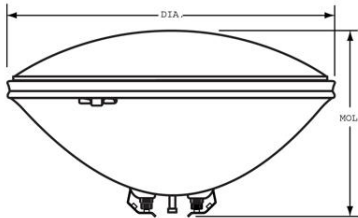

CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.

NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

GENERAL CHARACTERISTICS

| | |
|---------------------|-------------------|
| Lamp Type | Sealed Beam - PAR |
| Bulb | PAR56 |
| Base | Screw Terminals |
| Filament | C-6 |
| Rated Life (NOM) | 2000.0 h |
| Primary Application | Medium Flood |

PHOTOMETRIC CHARACTERISTICS

| | |
|---------------------------------------|-----------------------------|
| Initial Lumens (NOM) | 1050.0 |
| Beam Spread - Horizontal | 29.0 - 10.0 °/18.0 - 50.0 ° |
| Beam Spread - Vertical | 15.0 - 10.0 °/9.0 - 50.0 ° |
| Center Beam Candlepower (CBCP) (NOM) | 19000.0 |
| Color Temperature (NOM) | 2750.0 K |
| Nominal Initial Lumens per Watt (NOM) | 8.75 |

ELECTRICAL CHARACTERISTICS

| | |
|---------------|-------|
| Wattage (NOM) | 120.0 |
| Voltage (NOM) | 12.0 |

DIMENSIONS

| | |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 4.500 in(114.3 mm) |
| Bulb Diameter (DIA) (NOM) | 7.000 in(177.8 mm) |

PRODUCT INFORMATION

| | |
|----------------------------------|----------------|
| Product Code | 19024 |
| Description | 120 PAR56 MFL |
| Standard Package | Case |
| Standard Package GTIN | 10043168190241 |
| Standard Package Quantity | 12 |
| Sales Unit | Unit |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard Package | 12 |
| UPC | 043168190244 |