



GE
Lighting

19512 - 150PAR46/1

GE PAR46 - Train; Very Narrow Spot; Mining Lamps; Locomotive


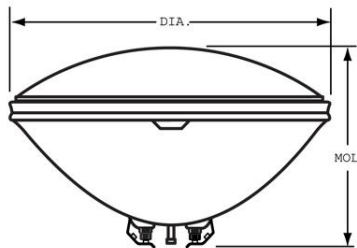


Photo
Not Available



CAUTIONS & WARNINGS

Warning

- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Use in enclosed fixture rated for this product.
 - Avoid direct water/liquid contact.

NOTES

- Lamp is made of heat resistant glass (HRG).

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR46
Base	Screw Terminals
Filament	CC-8
Rated Life (NOM)	800.0 h
Primary Application	Train;Very Narrow Spot;Mining Lamps;Locomotive

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1950.0
Beam Spread - Horizontal	9.0 - 10.0 °
Beam Spread - Vertical	9.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	100000.0
Nominal Initial Lumens per Watt (NOM)	13.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	150.0
Voltage (NOM)	32.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	3.750 in(95.2 mm)
Bulb Diameter (DIA) (NOM)	5.750 in(146.0 mm)

PRODUCT INFORMATION

Product Code	19512
Description	150PAR46/1
Standard Package	Case
Standard Package GTIN	10043168195123
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168195126