



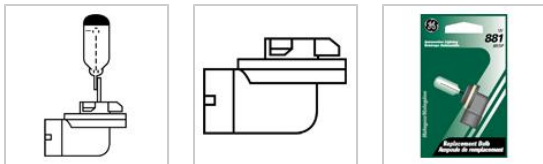

GE  
Lighting

## 12334 - 881/BP

GE T3.25 (T3 1/4) - Automotive

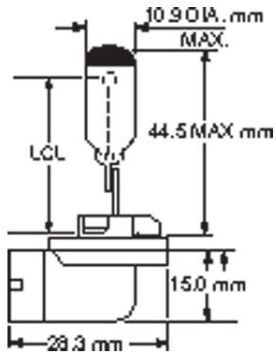

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp/fixture to cool before handling.

#### Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Dispose of lamp in a closed container.
  - Do not exceed rated voltage.
  - Do not turn on lamp until fully installed.
  - Do not use lamp if outer glass is scratched or broken.
  - Keep children away.
  - Use eye protection when handling lamp.
  - Use in enclosed fixture rated for this product.
  - Use protective screen when handling.

### GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.25 (T3 1/4)
Base	Right Angle Prefocus (PGJ13)
Filament	C-6
Bulb Finish	Blacktop
Rated Life (NOM)	300.0 h
Bulb Material	Hard glass
Atmosphere	Gas-filled
Primary Application	Fog/Driving; Back up; Cornering

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	540.0
Nominal Initial Lumens per Watt (NOM)	20.0
Mean Spherical Candlepower (MSCP) (NOM)	43.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	27.0
Voltage (NOM)	12.8

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.680 in(68.1 mm)
Bulb Diameter (DIA) (NOM)	0.406 in(10.3 mm)
Light Center Length (LCL) (NOM)	1.250 in(31.8 mm)

### PRODUCT INFORMATION

Product Code	12334
Description	881/BP
ANSI Code	881
Standard Package	Master
Standard Package GTIN	50043168123346
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	1
No Of Items Per Standard	48
Package	
UPC	043168960373