



GE
Lighting

19921 - 193E BULK

GE T3.25 (T3 1/4) - Automotive

This product is no longer manufactured.


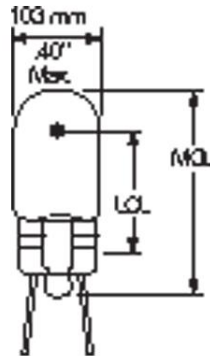


Photo
Not Available

GENERAL CHARACTERISTICS

| | |
|---------------------|--|
| Lamp Type | Miniature - T & TL Shape |
| Bulb | T3.25 (T3 1/4) |
| Base | Wedge, Wire Terminal (122) |
| Filament | C-2F |
| Rated Life (NOM) | 15000.0 h |
| Atmosphere | Vacuum |
| Primary Application | Roof marker/ identification;Trunk/Cargo Area |

PHOTOMETRIC CHARACTERISTICS

| | |
|---|------|
| Initial Lumens (NOM) | 25.0 |
| Nominal Initial Lumens per Watt (NOM) | 5.0 |
| Mean Spherical Candlepower (MSCP) (NOM) | 2.0 |

ELECTRICAL CHARACTERISTICS

| | |
|---------------|------|
| Wattage (NOM) | 5.0 |
| Voltage (NOM) | 14.0 |

DIMENSIONS

| | |
|------------------------------------|-------------------|
| Maximum Overall Length (MOL) (NOM) | 1.060 in(26.9 mm) |
| Bulb Diameter (DIA) (NOM) | 0.406 in(10.3 mm) |
| Light Center Length (LCL) (NOM) | 0.560 in(14.2 mm) |

PRODUCT INFORMATION

| | |
|----------------------------|----------------|
| Product Code | 19921 |
| Description | 193E BULK |
| ANSI Code | 193E |
| Standard Package | Case |
| Standard Package GTIN | 10043168199213 |
| Standard Package Quantity | 4000 |
| Sales Unit | Bulk |
| No Of Items Per Sales Unit | 1 |
| No Of Items Per Standard | 4000 |
| Package | |
| UPC | 043168199216 |

NOTES

• This is a wire terminal lamp. The glass to metal seal (and tip where applicable) are susceptible to damage by thermal shock, and soldering or welding within 1/8" of the glass should be avoided as glass cracks and air leaks may develop. Solderability may be adversely affected by storage for an extended period in excess of 6 months or by storage in a high humidity environment. Lamps with tinned leads would be subject to these storage restrictions. Nickel-plated leads are not recommended for soldering; however, their ability to be welded is not affected by these storage restrictions.