



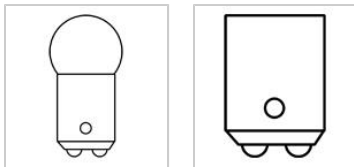

GE
Lighting

25794 - 90

GE G6 - Automotive; Low Voltage

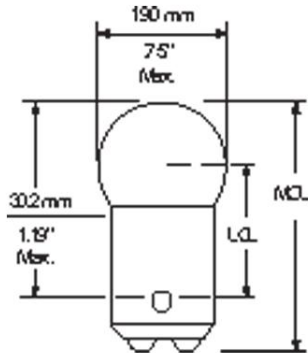

GENERAL CHARACTERISTICS

Lamp Type	Miniature - G Shape
Bulb	G6
Base	Double Contact Bayonet (BA15d)
Filament	C-2R
Rated Life (NOM)	750.0 h
Atmosphere	Gas-filled
Primary Application	Low Voltage;Back up;Brake Warning;Directional Signal Indicator;Dome;Instrument, General;License Plate;Map;Radio dial;Step/Courtesy;Trunk/Cargo Area;Under Hood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	75.0
Nominal Initial Lumens per Watt (NOM)	9.375
Mean Spherical Candlepower (MSCP) (NOM)	6.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	8.0
Voltage (NOM)	13.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.440 in(36.6 mm)
Bulb Diameter (DIA) (NOM)	0.750 in(19.0 mm)
Light Center Length (LCL) (NOM)	0.750 in(19.0 mm)

PRODUCT INFORMATION

Product Code	25794
Description	90
ANSI Code	90
Standard Package	Case
Standard Package GTIN	00043168257947
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168962797