



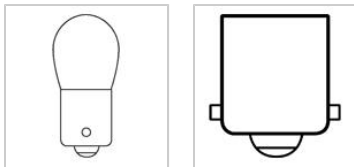

GE
Lighting

26709 - 1003

GE B6 - Automotive; Marine

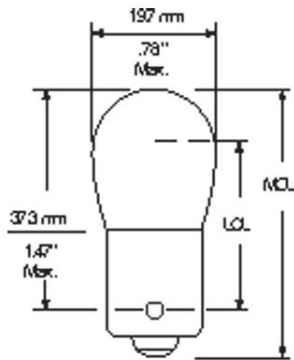

GENERAL CHARACTERISTICS

Lamp Type	Miniature - B Shape
Bulb	B6
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (MIN)	12.0 h
Rated Life (Vert)	200.0 h
Rated Life	200.0 hrs
Rated Life (Hor)	12.0 h
Atmosphere	Gas-filled
Primary Application	Marine; Back up; Dome; Glove Box; High Mount Stop; Instrument, General; License Plate; Map; Step/ Courtesy; Tail; Trunk/ Cargo Area; Turn Signal, Rear; Under Hood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	189.0
Initial Lumens	189.0
Initial Lumens (Hor)	15.75
Nominal Initial Lumens per Watt	15
Center Beam Candlepower (CBCP)	189.0
Mean Spherical Candlepower (MSCP)	15.0

ELECTRICAL CHARACTERISTICS

Wattage	12.0
Voltage (MIN)	200.0
Voltage	12.8

DIMENSIONS

Maximum Overall Length (MOL)	1.7500 in(44.4 mm)
Bulb Diameter (DIA)	0.750 in(19.0 mm)
Light Center Length (LCL)	1.060 in(26.9 mm)

PRODUCT INFORMATION

Product Code	26709
Description	1003
ANSI Code	1003
Standard Package	Case
Standard Package GTIN	20043168267094
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	50
Package	
UPC	043168267090