



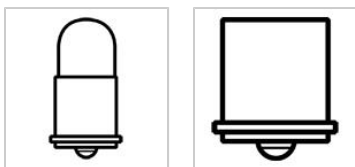

GE
Lighting

28567 - 330

GE T1.75 (T1 3/4) - Automotive; Aircraft; Low Voltage



GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T1.75 (T1 3/4)
Base	Single Contact Midget Flanged
Filament	C-2F
Rated Life (MIN)	1.0 h
Rated Life (Vert)	1500.0 h
Rated Life (NOM)	1500.0 h
Rated Life (Hor)	1.0 h
Atmosphere	Vacuum
Primary Application	Instrument, General;Aircraft;Low Voltage;Directional Signal Indicator

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (Vert)	6.0
Initial Lumens (NOM)	6.0
Initial Lumens (Hor)	6.0
Nominal Initial Lumens per Watt (NOM)	6.0
Center Beam Candlepower (CBCP) (NOM)	6.0
Mean Spherical Candlepower (MSCP) (NOM)	0.5

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	1.0
Voltage (MIN)	1500.0
Voltage (NOM)	14.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	0.630 in(16.0 mm)
Bulb Diameter (DIA) (NOM)	0.219 in(5.6 mm)
Light Center Length (LCL) (NOM)	0.380 in(9.7 mm)

PRODUCT INFORMATION

Product Code	28567
Description	330
ANSI Code	330
Standard Package	Case
Standard Package GTIN	20043168285678
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168285674