





GE
Lighting

47800 - 1003LL/BP2

GE B6 - Automotive

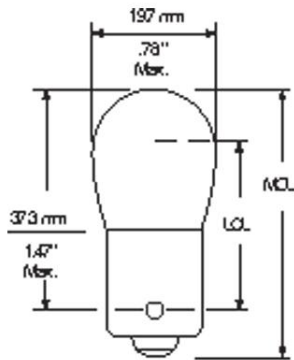

GENERAL CHARACTERISTICS

Lamp Type	Miniature - B Shape
Bulb	B6
Base	Single Contact Bayonet (BA15s)
Filament	C-6
Rated Life (NOM)	400.0 h
Atmosphere	Gas-filled
Primary Application	Under Hood; Back up; Dome; Glove Box; High Mount Stop; Instrument, General; License Plate; Map; Step/ Courtesy; Tail; Trunk/ Cargo Area; Turn Signal, Rear

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	189.0
Nominal Initial Lumens per Watt (NOM)	15.75
Mean Spherical Candlepower (MSCP) (NOM)	15.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	12.0
Voltage (NOM)	12.8

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.750 in(44.4 mm)
Bulb Diameter (DIA) (NOM)	0.750 in(19.0 mm)
Light Center Length (LCL) (NOM)	1.060 in(26.9 mm)

PRODUCT INFORMATION

Product Code	47800
Description	1003LL/BP2
ANSI Code	1003
Standard Package	Master
Standard Package GTIN	50043168478002
Standard Package Quantity	48
Sales Unit	Blister
No Of Items Per Sales Unit	2
No Of Items Per Standard Package	96
UPC	043168478007