




GE
Lighting

11129 - 75PAR30L/H/SP10

GE PAR30L

- Standard Halogen - Crisp, white light

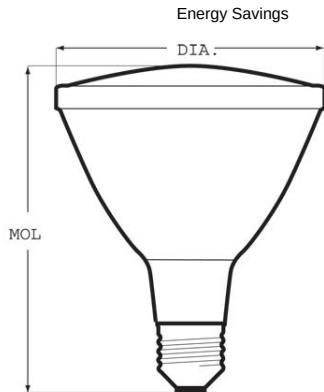

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
 - Do not use where directly exposed to water or outdoors without an enclosed fixture.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR30L
Base	Medium NP
Filament	CC-8
Rated Life (NOM)	3000.0/6000.0 h

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	940.0 /751.0
Center Beam Candlepower (CBCP) (NOM)	13000.0
Color Temperature (NOM)	2830.0 K
Beam Spread (NOM)	10.0 °
Nominal Initial Lumens per Watt (NOM)	12.53333 /11.37879

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	75.0
Voltage (NOM)	130.0
Burn Position	Universal burning position

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.750 in(120.6 mm)
Bulb Diameter (DIA) (NOM)	3.750 in(95.2 mm)

PRODUCT INFORMATION

Product Code	11129
Description	75PAR30L/H/SP10
Standard Package	Case
Standard Package GTIN	10043168111291
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168111294