



Reflector Infrared BR40,PAR38

Ref IR 175W 115-125V Red 1CT

Philips Family of Specialty Incandescents provide the perfect light for dramatic accents and display lighting as well as general lighting in a variety of applications. Philips Infrared lamps are suited for heating and drying in industrial and commercial applications. These incandescent, gas-filled infrared heat lamps come up to full temperature almost immediately, eliminating costly warm-up time. Highly efficient heat generators that produce a minimum of light rays and a high amount of infrared radiation. The BR40 lamp provides a built-in reflector for radiant energy control.

Product data

• General Characteristics

| | |
|------------------------|--------------------------------------|
| Base | Medium [Single Contact Medium Screw] |
| Bulb | PAR38 [PAR 4.75 inch/121mm] |
| Bulb Material | Hard Glass |
| Bulb Finish | Red |
| Operating Position | h45 |
| Main Application | Infrared Industrial |
| Nominal Lifetime | 5000 hr |
| Rated Lifetime (hours) | 5000 hr |

• Light Technical Characteristics

| | |
|-------------------|---|
| Color Designation | R |
|-------------------|---|

• Electrical Characteristics

| | |
|----------|-----------|
| Watts | 175 W |
| Voltage | 115-125 V |
| Dimmable | Yes |

• Product Dimensions

| | |
|-----------------------|--------------|
| Overall Length C | 135 (max) mm |
| Overall Length Rim C1 | 123 (max) mm |
| Diameter D | 121 mm |


• Product Data

| | |
|--------------------|------------------------------|
| Product number | 232306 |
| Full product name | Ref IR 175W 115-125V Red 1CT |
| Short product name | IR175R/PAR 120V 12/1 |
| Pieces per Sku | 1 |
| eop_pck_cfg | 12 |
| Skus/Case | 12 |
| Bar code on pack | 46677116279 |
| Bar code on case | 50046677232301 |
| Logistics code(s) | 923813634608 |
| eop_net_weight_pp | 308.000 gr |

PHILIPS

Reflector Infrared BR40,PAR38

Dimensional drawing

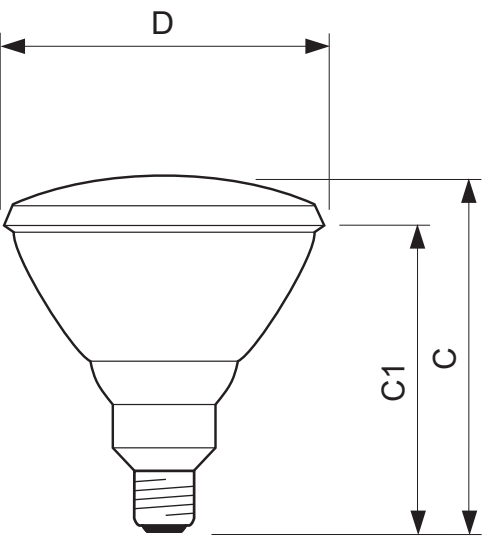

Refi IR 175W 115-125V Red 1CT

| Product | C (Min) | C (Norm) | C (Max) | C1 (Min) | C1 (Norm) | C1 (Max) | D (Min) | D (Norm) | D (Max) |
|--------------------------------|---------|----------|---------|----------|-----------|----------|---------|----------|---------|
| IR175R PAR38 175W E26 115-125V | - | - | 135 | - | - | 123 | - | 121 | - |



E26

