



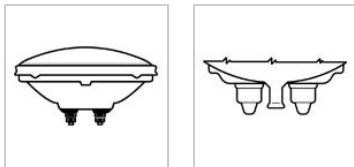

GE
Lighting

41673 - FCXQ650PAR367

GE Quartzline® Showbiz® PAR36 - Stage & Studio; Medium Flood

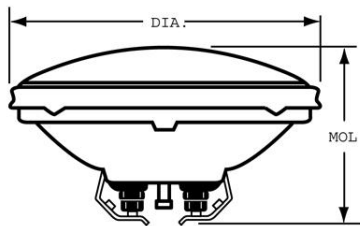

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
 - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.
 - Dispose of lamp in a closed container.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in enclosed fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
 - Avoid direct water/liquid contact.
 - Use in enclosed fixture rated for this product.
 - Do not use lamp if outer glass is scratched or broken.
 - Do not exceed 110% of rated voltage.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Ferrule
Filament	C-7A
Rated Life (NOM)	100.0 h
Primary Application	Stage & Studio; Medium Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	24000.0
Beam Spread - Horizontal	40.0 - 50.0 °
Beam Spread - Vertical	30.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	24000.0
Color Temperature (NOM)	3200.0 K
Max. Beam Candlepower (MBCP) (MAX)	24000.0
Nominal Initial Lumens per Watt (NOM)	36.92308

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	650.0
Voltage (NOM)	120.0
Burn Position	Horizontal ±15°

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	41673
Description	FCXQ650PAR367
ANSI Code	FCX
Standard Package	Case
Standard Package GTIN	10043168416730
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168416733