



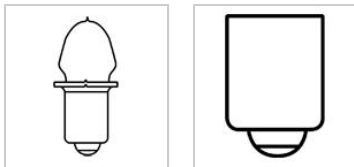

GE
Lighting

25252 - PR12

GE B3.5 (B3 1/2) - Low Voltage; Hand Lantern; Flashlight

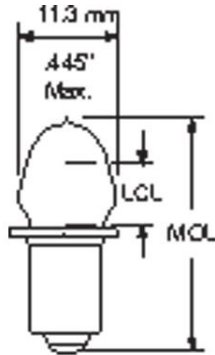

GENERAL CHARACTERISTICS

Lamp Type	Miniature - B Shape
Bulb	B3.5 (B3 1/2)
Base	Single Contact Miniature Flanged
Filament	C-2R
Rated Life (NOM)	15.0 h
Atmosphere	Gas-filled
Primary Application	Low Voltage;Hand Lantern;Hand Lantern;Flashlight

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	39.0
Nominal Initial Lumens per Watt (NOM)	13.0
Mean Spherical Candlepower (MSCP) (NOM)	3.1

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	3.0
Voltage (NOM)	5.95

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.250 in(31.8 mm)
Bulb Diameter (DIA) (NOM)	0.438 in(11.1 mm)
Light Center Length (LCL) (NOM)	0.250 in(6.4 mm)

PRODUCT INFORMATION

Product Code	25252
Description	PR12
ANSI Code	PR12
Standard Package	Case
Standard Package GTIN	00043168252522
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168963411