



GE  
Lighting

## 27332 - H3-70

GE T3.5 (T3 1/2) - Low Voltage


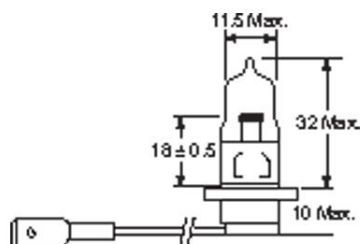


Photo  
Not Available

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp/fixture to cool before handling.

#### Warning

- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in fixture rated for this product.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Dispose of lamp in a closed container.
  - Do not exceed rated voltage.
  - Do not touch glass with bare hands.
  - Do not turn on lamp until fully installed.
  - Do not use lamp if outer glass is scratched or broken.
  - Keep children away.
  - Use eye protection when handling lamp.
  - Use protective screen when handling.

### GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.5 (T3 1/2)
Base	PK22S
Filament	CC-6
Rated Life (NOM)	225.0 h
Bulb Material	Quartz
Atmosphere	Gas-filled
Additional Info	UV reducing
Primary Application	Low Voltage

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1695.0
Nominal Initial Lumens per Watt (NOM)	22.6
Mean Spherical Candlepower (MSCP) (NOM)	135.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	75.0
Voltage (NOM)	28.0

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.650 in(41.9 mm)
Bulb Diameter (DIA) (NOM)	0.438 in(11.1 mm)
Light Center Length (LCL) (NOM)	0.710 in(18.0 mm)

### PRODUCT INFORMATION

Product Code	27332
Description	H3-70
Standard Package	Case
Standard Package GTIN	10043168273326
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168273329