



GE
Lighting

12961 - 4402A

GE PAR36 - CIM

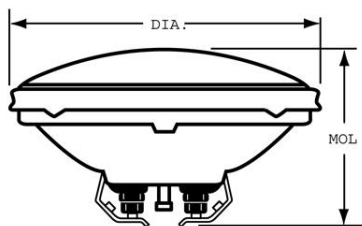


Photo
Not Available

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	400.0 h
Primary Application	CIM

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	50.0 - 10.0 °
Beam Spread - Vertical	25.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	1000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	12961
Description	4402A
ANSI Code	4402A
Standard Package	Case
Standard Package GTIN	10043168129616
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168129619