



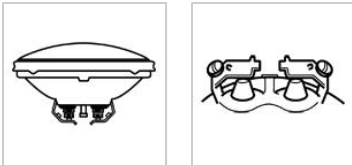

GE  
Lighting

**24892 - 4595**

GE PAR36 - Aircraft

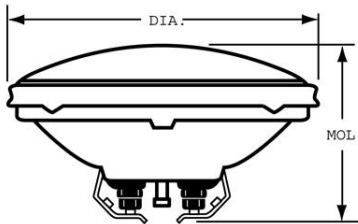

### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR36             |
| Base                | Screw Terminals   |
| Filament            | C-6               |
| Rated Life (NOM)    | 300.0 h           |
| Primary Application | Aircraft          |

### PHOTOMETRIC CHARACTERISTICS

|                                    |               |
|------------------------------------|---------------|
| Beam Spread - Horizontal           | 14.0 - 10.0 ° |
| Beam Spread - Vertical             | 6.0 - 10.0 °  |
| Max. Beam Candlepower (MBCP) (MAX) | 60000.0       |

### ELECTRICAL CHARACTERISTICS

|               |       |
|---------------|-------|
| Wattage (NOM) | 100.0 |
| Voltage (NOM) | 13.0  |

### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 2.750 in(69.8 mm)  |
| Bulb Diameter (DIA) (NOM)          | 4.500 in(114.3 mm) |

### PRODUCT INFORMATION

|                            |                |
|----------------------------|----------------|
| Product Code               | 24892          |
| Description                | 4595           |
| ANSI Code                  | 4595           |
| Standard Package           | Case           |
| Standard Package GTIN      | 00043168248921 |
| Standard Package Quantity  | 12             |
| Sales Unit                 | Unit           |
| No Of Items Per Sales Unit | 1              |
| No Of Items Per Standard   | 12             |
| Package                    |                |
| UPC                        | 043168962483   |