



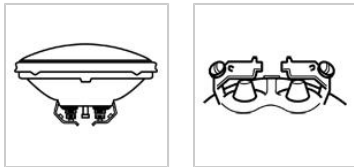

GE
Lighting

43561 - H7550

GE PAR36 - Emergency Building Light; Emergency Building; Hand Lantern; Flashlight

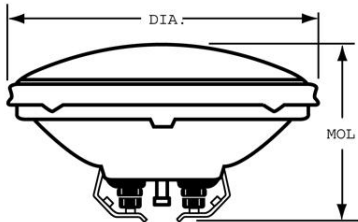

CAUTIONS & WARNINGS

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	50.0 h
Primary Application	Hand Lantern;Emergency Building;Hand Lantern;Flashlight

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	3.0 - 10.0 °
Beam Spread - Vertical	3.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	25000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	8.0
Voltage (NOM)	6.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	43561
Description	H7550
ANSI Code	H7550
Standard Package	Case
Standard Package GTIN	10043168435618
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168435611