



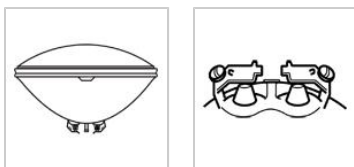

GE  
Lighting

**24742 - 4537**

GE PAR46 - Aircraft

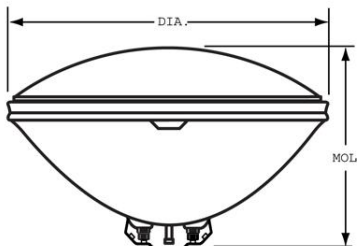

#### NOTES

- Filament shielded.

#### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR46             |
| Base                | Screw Terminals   |
| Filament            | C-6               |
| Rated Life (NOM)    | 25.0 h            |
| Primary Application | Aircraft          |

#### PHOTOMETRIC CHARACTERISTICS

|                                    |               |
|------------------------------------|---------------|
| Beam Spread - Horizontal           | 11.0 - 10.0 ° |
| Beam Spread - Vertical             | 6.0 - 10.0 °  |
| Max. Beam Candlepower (MBCP) (MAX) | 200000.0      |

#### ELECTRICAL CHARACTERISTICS

|               |       |
|---------------|-------|
| Wattage (NOM) | 100.0 |
| Voltage (NOM) | 13.0  |

#### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 3.130 in(79.5 mm)  |
| Bulb Diameter (DIA) (NOM)          | 5.750 in(146.0 mm) |

#### PRODUCT INFORMATION

|                            |                |
|----------------------------|----------------|
| Product Code               | 24742          |
| Description                | 4537           |
| ANSI Code                  | 4537           |
| Standard Package           | Case           |
| Standard Package GTIN      | 10043168247426 |
| Standard Package Quantity  | 12             |
| Sales Unit                 | Unit           |
| No Of Items Per Sales Unit | 1              |
| No Of Items Per Standard   | 12             |
| Package                    |                |
| UPC                        | 043168247429   |