





GE  
Lighting

**24833 - 4572**

GE PAR46 - Military

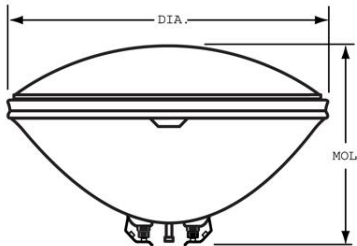

#### GENERAL CHARACTERISTICS

|                     |                   |
|---------------------|-------------------|
| Lamp Type           | Sealed Beam - PAR |
| Bulb                | PAR46             |
| Base                | Screw Terminals   |
| Filament            | CC-6              |
| Rated Life (NOM)    | 300.0 h           |
| Primary Application | Military          |

#### PHOTOMETRIC CHARACTERISTICS

|                                    |               |
|------------------------------------|---------------|
| Beam Spread - Horizontal           | 55.0 - 10.0 ° |
| Beam Spread - Vertical             | 55.0 - 10.0 ° |
| Max. Beam Candlepower (MBCP) (MAX) | 4500.0        |

#### ELECTRICAL CHARACTERISTICS

|               |       |
|---------------|-------|
| Wattage (NOM) | 150.0 |
| Voltage (NOM) | 28.0  |

#### DIMENSIONS

|                                    |                    |
|------------------------------------|--------------------|
| Maximum Overall Length (MOL) (NOM) | 3.750 in(95.2 mm)  |
| Bulb Diameter (DIA) (NOM)          | 5.750 in(146.0 mm) |

#### PRODUCT INFORMATION

|                                  |                |
|----------------------------------|----------------|
| Product Code                     | 24833          |
| Description                      | 4572           |
| ANSI Code                        | 4572           |
| Standard Package                 | Case           |
| Standard Package GTIN            | 00043168248334 |
| Standard Package Quantity        | 12             |
| Sales Unit                       | Unit           |
| No Of Items Per Sales Unit       | 1              |
| No Of Items Per Standard Package | 12             |
| UPC                              | 043168962407   |