




GE
Lighting

25005 - 4578

GE PAR46 - CIM

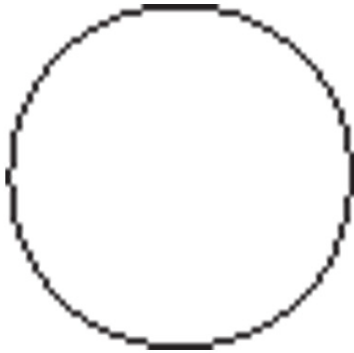

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR46
Base	2 Contact Lugs
Filament	2C-6
Rated Life (NOM)	800.0 h
Primary Application	CIM

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	55.0 - 10.0 °
Beam Spread - Vertical	30.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	1600.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	60.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.000 in(101.6 mm)
Bulb Diameter (DIA) (NOM)	5.750 in(146.0 mm)

PRODUCT INFORMATION

Product Code	25005
Description	4578
ANSI Code	4578
Standard Package	Case
Standard Package GTIN	10043168250051
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168250054