





GE
Lighting

39022 - 4537X

GE PAR46 - Marine

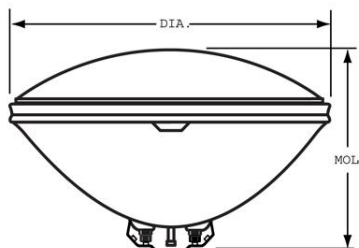

NOTES

- Filament shielded.
- Filament shielded.
- Filament shielded.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR46
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	25.0 h
Primary Application	Marine

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	11.0 - 10.0 °
Beam Spread - Vertical	6.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	200000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	100.0
Voltage (NOM)	13.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	3.130 in(79.5 mm)
Bulb Diameter (DIA) (NOM)	5.750 in(146.0 mm)

PRODUCT INFORMATION

Product Code	39022
Description	4537X
ANSI Code	4537X
Standard Package	Case
Standard Package GTIN	00043168390224
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168962643