



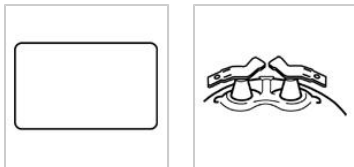

GE  
Lighting

## 45110 - 4912-1

GE 165mm - Truck

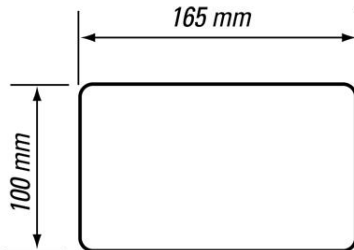

### CAUTIONS & WARNINGS

#### Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
  - Dispose of lamp in a closed container.
  - Do not use lamp if outer glass is scratched or broken.

### NOTES

- Filament shielded.

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - Rectangular
Bulb	165mm
Base	Slip-on Terminals
Filament	C-6
Rated Life (NOM)	300.0 h
Primary Application	Truck

### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	40.0 - 10.0 °
Beam Spread - Vertical	7.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	14000.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	12.8

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.530 in(115.1 mm)
Bulb Diameter (DIA) (NOM)	6.500 in(165.1 mm)

### PRODUCT INFORMATION

Product Code	45110
Description	4912-1
ANSI Code	4912-1
Standard Package	Case
Standard Package GTIN	10043168451106
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168451109