





GE
Lighting

10044 - 60BTT/POST/CD

GE halogen postlight 60 watt BTT 1-pack

- GE halogen bulbs deliver crisp, white light. This unsurpassed light quality is ideal for adding depth, drama and interest to any outdoor space. Use GE halogen postlight bulbs in enclosed outdoor fixtures like porch lights, postlights and carriage lights and create a dramatic effect
- Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.
- GE's Long Life Postlights are ideal for enclosed outdoor fixtures.
- Estimated yearly energy costs \$7.23 based on 3 hours per day \$0.11 per kWh
- Lasts 2.7 years based on 3 hours per day usage
- BTT shape with medium base for use in outdoor carriage and post lights

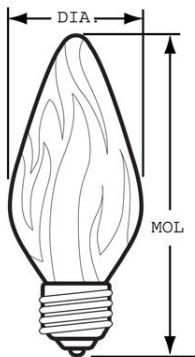

GENERAL CHARACTERISTICS

Lamp Type	Halogen - Decorative
Bulb	F15
Base	Medium Screw (E26)
Filament	C-8
Rated Life (NOM)	3000.0 h
Life in Years (NOM)	2.7
Primary Application	Post Light

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	900.0
Color Temperature (NOM)	2800.0 K
Nominal Initial Lumens per Watt (NOM)	15.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	60.0
Voltage (NOM)	120.0
Estimated Energy Cost per Year (NOM)	7.23

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	4.750 in(120.6 mm)
Bulb Diameter (DIA) (NOM)	1.812 in(46.0 mm)
Light Center Length (LCL) (NOM)	3.000 in(76.2 mm)

PRODUCT INFORMATION

Product Code	10044
Description	60BTT/POST/CD
Standard Package	Case
Standard Package GTIN	10043168100448
Standard Package Quantity	5
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	5
UPC	043168100441

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken, even if bulb continues to light. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not exceed rated voltage.
 - Do not use lamp if outer glass is scratched or broken, even if bulb continues to light. Turn power off, remove and dispose.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.
 - Turn power off if glass bulb is broken, even if bulb continues to light. Remove and dispose of lamp.
- Risk of Fire
 - In table lamp, use only with shade.
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

*Guaranteed to last 2 years based on 4 hours use per day at 120V.