




GE
Lighting

17926 - 50PAR/H/FL

GE energy-efficient halogen 46/50 watt PAR38 floodlight 1-pack

- GE energy-efficient halogen bulbs deliver crisp, white light. This unsurpassed light quality is ideal for adding depth, drama and interest to any room or outdoor space. These GE energy-efficient halogen floodlights use less energy than standard halogen bulbs, saving money on energy. GE energy-efficient halogen floodlights feature lenses designed to provide a precise beam pattern, dispensing broad beams of crisp, white light throughout your home. Use these bulbs in indoor track and recessed fixtures or outdoor security fixtures instead of regular incandescent and create a dramatic effect
- Estimated yearly energy costs \$6.02 based on 3 hours per day \$0.11 per kWh
- PAR38 indoor/outdoor floodlight with medium base for use in outdoor security lighting and indoor directional fixtures
- Lasts 1.83/3.65 years based on 3 hours per day usage

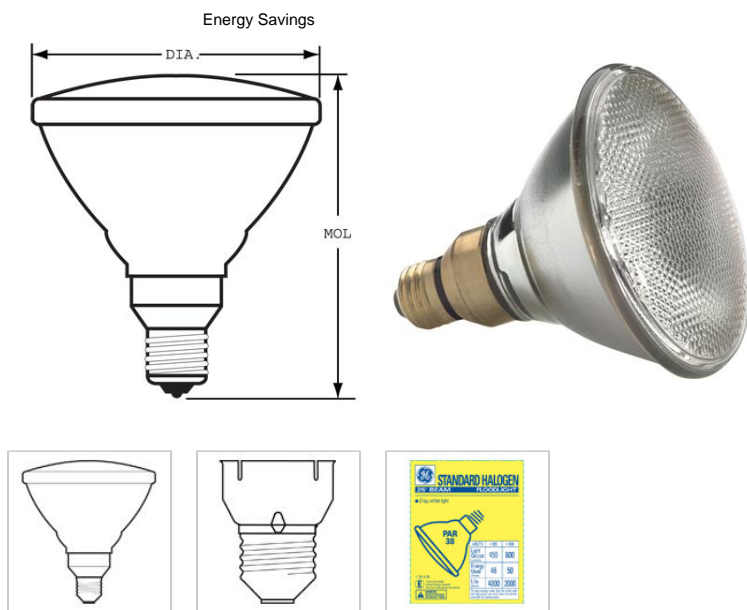

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Rated Life (NOM)	2000.0/4000.0 h
Primary Application	Indoor and outdoor Floodlight

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	600.0 /450.0
Center Beam Candlepower (CBCP) (NOM)	2200.0
Color Temperature (NOM)	2750.0 K
Beam Spread (NOM)	25.0 °
Nominal Initial Lumens per Watt (NOM)	12.0 /9.782609

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	50.0
Voltage (NOM)	130.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.313 in(135.0 mm)
Bulb Diameter (DIA) (NOM)	4.750 in(120.6 mm)

PRODUCT INFORMATION

Product Code	17926
Description	50PAR/H/FL
Standard Package	Case
Standard Package GTIN	10043168179260
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168179263

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.