






GE
Lighting

47459 - FLE29HLX/2/XL/CD

GE Soft White Spiral® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant

This product is no longer manufactured. Remaining stock will be sold.

a product of
ecomagination

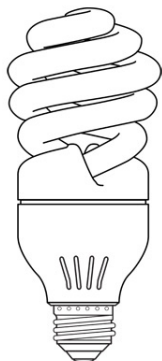

GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Self-Ballasted
Bulb	T4
Base	Medium Screw (E26)
Equivalent Wattage (NOM)	120.0 W
Rated Life (NOM)	12000.0 h
Starting Temperature (MIN)	-15.0 °C
Mercury Content (NOM)	3.5 mg
Picograms of Mercury (NOM)	132.6 pg
Primary Application	Standard;Facilities;Retail Display;Hospitality;Office;Restaurant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2200.0
Mean Lumens (NOM)	1760.0
Nominal Initial Lumens per Watt (NOM)	75.86207
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	29.0
Input Voltage (NOM)	120.0 V
Input Current (NOM)	0.47 A

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	6.300 in(160.0 mm)
Nominal Length (NOM)	6.299 in(160.0 mm)

PRODUCT INFORMATION

Product Code	47459
Description	FLE29HLX/2/XL/CD
Standard Package	BUNDLE
Standard Package GTIN	10043168474594
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	12
Package	
UPC	043168474597

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

Warning

- Risk of Electric Shock
 - Do not open - no user serviceable parts inside.
 - Do not use where directly exposed to water.