



GE
Lighting

48278 - F32T8SP35ISWMECO

GE Ecolux® Watt-Miser® Starcoat® T8

- Passes TCLP, which can lower disposal costs.

- Saves energy compared to standard wattage lamps

This product is no longer manufactured.



a product of
ecomagination



High Color Rendering
Energy Savings



Reduced Wattage
Meets Federal Minimum Efficiency Standards



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

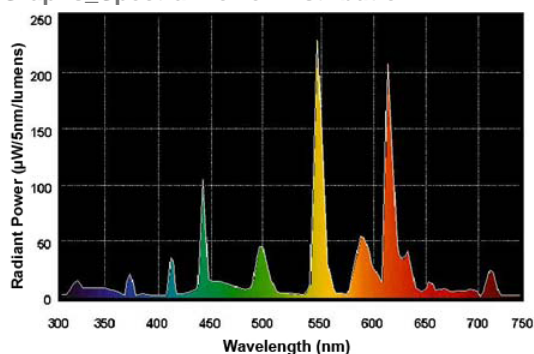

Graphs_Lumen Maintenance

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	30000.0 h
Rated Life (rapid start) @ Time	21000 h @ 3 h
	30000 h @ 12 h
	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	15.0 °C
Mercury Content (NOM)	3.95 mg
Picograms of Mercury (NOM)	49.1 pg
Additional Info	TCLP compliant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2850.0
Mean Lumens (NOM)	2680.0
Nominal Initial Lumens per Watt (NOM)	95.0
Color Temperature (NOM)	3500.0 K
Color Rendering Index (CRI) (NOM)	83.0
S/P Ratio (Scotopic/Photopic Ratio) (NOM)	1.4

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	30.0
Open Circuit Voltage (instant start) Min @ Temperature	550 V @ 15 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	47.780 in(1213.6 mm)
Minimum Overall Length (NOM)	47.670 in(1210.8 mm)
Nominal Length (NOM)	48.000 in(1219.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Max Base Face to Base Face (A) (NOM)	47.220 in(1199.4 mm)
Face to End of Opposing Pin (B) (MIN)	47.400 in(1204.0 mm)
Face to End of Opposing Pin (B) (MAX)	47.500 in(1206.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	47.670 in(1210.8 mm)

PRODUCT INFORMATION

Product Code	48278
Description	F32T8SP35ISWMECO
Standard Package	Case
Standard Package GTIN	10043168482780
Standard Package Quantity	36
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	36
UPC	043168482783

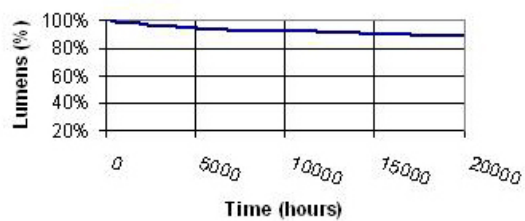

Graphs_Lamp Mortality

