



GE
Lighting



49779 - F32T8SXL/SP41ECO

GE Ecolux® Starcoat® T8

- Passes TCLP, which can lower disposal costs.
 - Provides significantly longer life than standard lamp helping to reduce maintenance costs
- This product is no longer manufactured.**



High Color Rendering
Meets Federal Minimum Efficiency Standards



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

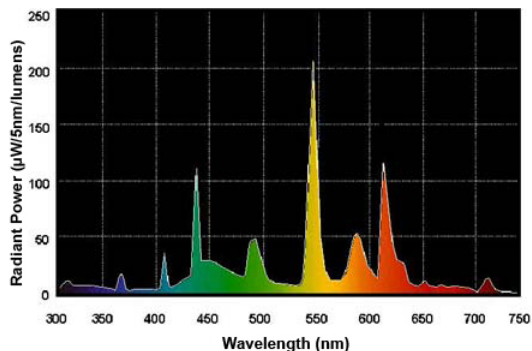

Graphs_Lumen Maintenance

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	Medium Bi-Pin (G13)
Rated Life (instant start) @ Time	30000.0 h
Rated Life (rapid start) @ Time	31000 h @ 3 h
	40000 h @ 12 h
	55000.0 @ 3.0/60000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	15.0 °C
Mercury Content (NOM)	3.95 mg
Picograms of Mercury (NOM)	49.2 pg
Additional Info	TCLP compliant
Primary Application	Standard

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2850.0
Mean Lumens (NOM)	2675.0
Nominal Initial Lumens per Watt (NOM)	89.0625
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	81.0
S/P Ratio (Scotopic/Photopic Ratio) (NOM)	1.6

ELECTRICAL CHARACTERISTICS


Wattage (NOM)	32.0
Open Circuit Voltage (rapid start) Min @ Temperature	315 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	47.780 in(1213.6 mm)
Minimum Overall Length (NOM)	47.670 in(1210.8 mm)
Nominal Length (NOM)	48.000 in(1219.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Max Base Face to Base Face (A) (NOM)	47.220 in(1199.4 mm)
Face to End of Opposing Pin (B) (MIN)	47.400 in(1204.0 mm)
Face to End of Opposing Pin (B) (MAX)	47.500 in(1206.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	47.670 in(1210.8 mm)

PRODUCT INFORMATION

Product Code	49779
Description	F32T8SXL/SP41ECO
ANSI Code	1005-2
Standard Package	Case
Standard Package GTIN	10043168497791
Standard Package Quantity	36
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	36
UPC	043168497794

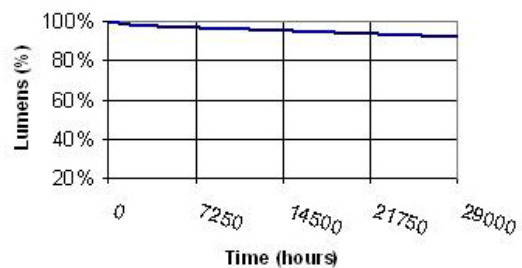

Graphs_Lamp Mortality

