



T5 High Output Energy Advantage

F54T5/830 HO EA 49W/ALTO

Philips Energy Advantage T5 HO 49W lamps are environmentally-responsible, ultra-slim and have extraordinary light output with increased energy savings.

Product data

• General Characteristics

Base	Miniature Bipin
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Rated Avg. Life	30000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
16000h Rated,3h	
LSF HF Preheat	94 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation	Warm White
Color Temperature	3000 K
Luminous Flux EL	4450 Lm
25°C, Rated	
Luminous Flux EL	4450 Lm
25°C, Nominal	
Initial Lumens	5000 Lm
Lum Efficacy Rated	93 Lm/W
HF 25°C	
Lum Efficacy Rated	102 Lm/W
HF 35°C	

LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Watts	49 W
Lamp Wattage EL	48.0 W
25°C, Rated	
Lamp Wattage EL	48.0 W
25°C, Nominal	
Lamp Wattage EL	48.9 W
35°C	
Lamp Voltage EL	105 V
25°C	
Lamp Voltage EL	107 V
35°C	
Lamp Current EL	0.460 A
25°C	
Lamp Current EL	0.460 A
35°C	

PHILIPS

T5 High Output Energy Advantage

Dimmable Yes

• Environmental Characteristics

Energy Efficiency Label (EEL) A
Mercury (Hg) Content 1.4 mg

• Measuring Conditions

Calibration Current 0.460 A
HF Generator Rated Voltage 222 V
Resistor 255 ohm

• Product Dimensions



Base Face to Base Face A 1149.0 (max) mm

Insertion Length B 1153.7 (min), 1156.1 (max) mm
Overall Length C 1163.2 (max) mm
Diameter D 17 (max) mm

• Product Data

Product number 220491
Full product name F54T5/830 HO EA 49W/ALTO
Short product name F54T5 830 HO EA ALTO 49W
Pieces per Sku 1
eop_pck_cfg 40
Skus/Case 40
Bar code on pack 46677220495
Bar code on case 50046677220490
Logistics code(s) 927991983031
eop_net_weight_pp 104.500 gr

Dimensional drawing


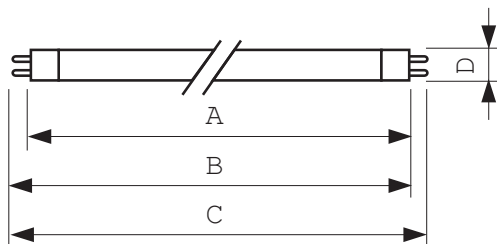


G5

F54T5/830 HO EA 49W/ALTO

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO Eco F54T5/830 HO EA 49W	1149.0	1153.7	1156.1	1163.2	17

Photometric data

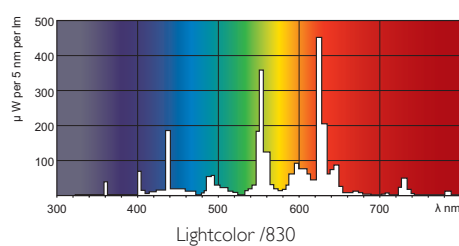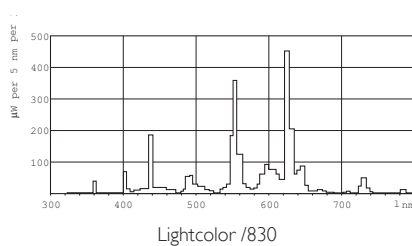



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 23
data subject to change