



# MasterColor CDM PAR38

MasterColor CDM 100W/940 Med PAR38 CL 1CT

Philips MasterColor® Ceramic Metal Halide PAR38 Lamps offer high-efficiency, ceramic metal halide reflector lamps with a stable color over lifetime and a crisp, sparkling light.

## Product data

### • General Characteristics

Base	Medium [Single Contact Medium Screw]
Bulb	PAR38 [PAR 4.75 inch/121mm]
Bulb Finish	Clear
Operating Position	Universal [Any or Universal (U)]
RatedAvgLife(See Family Notes)	12500 hr

### • Light Technical Characteristics

Beam Description	Flood [Flood]
Beam Angle	25 D
Beam Angle Technical	19 (min), 25 (nom), 31 (max) D
Approx. MBCP	19000 cd
Color Code	940 [CCT of 4000K]
Color Rendering Index	90 (min), 92 (nom) Ra8
Color Designation	Cool White
Color Temperature	4000 K
Color Temperature technical	4000 K
Initial Lumens	5700 Lm
Initial Lumens	5700 Lm
Chromaticity Coordinate X	0.384 -
Chromaticity Coordinate Y	0.369 (min), 0.375 (nom), 0.381 (max) -

### • Electrical Characteristics

System Power EM	129 W
Watts	100 W
Lamp Wattage	95 W

Lamp Wattage EL	100 W
Mains Voltage Stable Operation	120 V
Lamp Voltage	102 V
Lamp Current EM	1.1 A
Lamp Current EL	1.1 A
Ignition Time	10 (max) s
Re-ignition Time [min]	8 (max) min

### • Luminaire Design Requirements

Cap-Base Temperature	190 (max) C
Bulb Temperature	350 (max) C

### • Product Dimensions

Overall Length C	138.112 (max) mm
Diameter D	120.65 mm

### • Product Data

Product number	288787
Full product name	MasterColor CDM 100W/940 Med PAR38 CL 1CT
Short product name	CDM100/PAR38/FL/4K ALTO 12PK
Pieces per Sku	1
eop_pck_cfg	12
Skus/Case	12
Bar code on pack	46677288785
Bar code on case	50046677288780
Logistics code(s)	928601130103
tpd_ilcos_cd	MR-100/40/1A-H-E26-121/25
eop_net_weight_pp	0.307 kg


**PHILIPS**

### Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or

other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

### Dimensional drawing

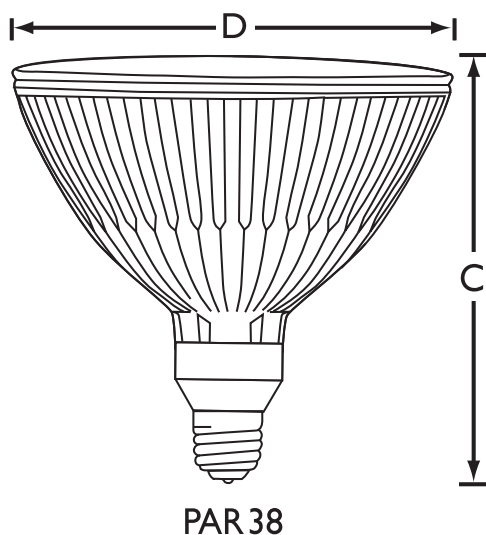

E26

### MasterColor CDM 100W/940 Med PAR38 CL 1CT

Product	C (Max)	D (Norm)
CDM 100W/940 E26 PAR38 Flood 25D	138.112	120.65



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, February 1  
data subject to change