



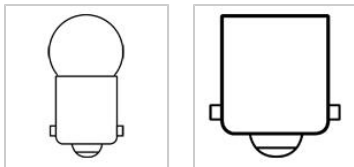

GE
Lighting

25836 - 97

GE G6 - Automotive; Low Voltage

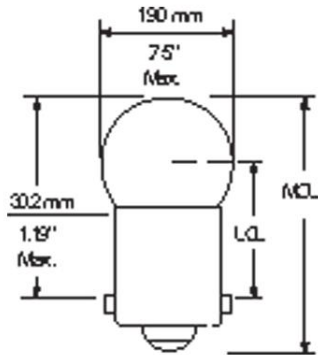

GENERAL CHARACTERISTICS

Lamp Type	Miniature - G Shape
Bulb	G6
Base	Single Contact Bayonet (BA15s)
Filament	C-2V
Rated Life (NOM)	5000.0 h
Atmosphere	Gas-filled
Primary Application	Low Voltage; Back up; Dome; Instrument, General; License Plate; Parking; Sidemarker, Front; Sidemarker, Rear; Step/ Courtesy; Stop; Tail

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	50.0
Nominal Initial Lumens per Watt (NOM)	5.555556
Mean Spherical Candlepower (MSCP) (NOM)	4.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	9.0
Voltage (NOM)	13.5

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	1.440 in(36.6 mm)
Bulb Diameter (DIA) (NOM)	0.750 in(19.0 mm)
Light Center Length (LCL) (NOM)	0.810 in(20.6 mm)

PRODUCT INFORMATION

Product Code	25836
Description	97
ANSI Code	97
Standard Package	Case
Standard Package GTIN	20043168258368
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168258364