






GE  
Lighting

## 39406 - 500PAR64/NSP

GE PAR64 - Narrow Spot

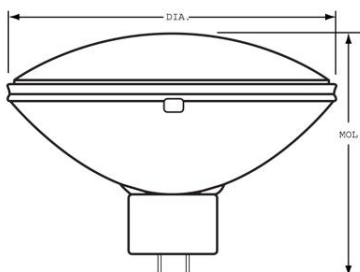

### CAUTIONS & WARNINGS

#### Warning

- Risk of Fire
  - Keep combustible materials away from lamp.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.

### NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR64
Base	Extended Mogul End Prong (GX16d EXT)
Filament	CC-13
Rated Life (NOM)	2000.0 h
Primary Application	Narrow Spot

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	6500.0
Beam Spread - Horizontal	19.0 - 10.0 °/12.0 - 50.0 °
Beam Spread - Vertical	14.0 - 10.0 °/7.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	110000.0
Color Temperature (NOM)	2800.0 K
Max. Beam Candlepower (MBCP) (MAX)	110000.0
Nominal Initial Lumens per Watt (NOM)	13.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	500.0
Voltage (NOM)	120.0

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	6.000 in(152.4 mm)
Bulb Diameter (DIA) (NOM)	8.000 in(203.2 mm)

### PRODUCT INFORMATION

Product Code	39406
Description	500PAR64/NSP
Standard Package	Case
Standard Package GTIN	10043168394069
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168394062