



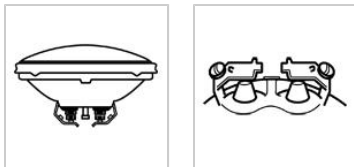

GE  
Lighting

## 41667 - DWEQ650PAR361

GE Quartzline® Showbiz® PAR36 - Stage & Studio; Medium Flood

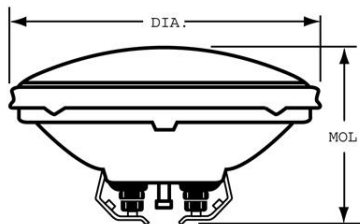

### CAUTIONS & WARNINGS

#### Caution

- Risk of Burn
  - Allow lamp/fixture to cool before handling.
  - Turn power off before installing lamp.
- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.
  - Dispose of lamp in a closed container.

#### Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
  - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use in enclosed fixture rated for this product.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Avoid direct water/liquid contact.
  - Use in enclosed fixture rated for this product.
  - Do not use lamp if outer glass is scratched or broken.
  - Do not exceed 110% of rated voltage.

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Rated Life (NOM)	100.0 h
Primary Application	Stage & Studio; Medium Flood

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	24000.0
Beam Spread - Horizontal	40.0 - 50.0 °
Beam Spread - Vertical	30.0 - 50.0 °
Center Beam Candlepower (CBCP) (NOM)	24000.0
Color Temperature (NOM)	3200.0 K
Max. Beam Candlepower (MBCP) (MAX)	24000.0
Nominal Initial Lumens per Watt (NOM)	36.92308

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	650.0
Voltage (NOM)	120.0
Burn Position	Horizontal $\pm 15^\circ$

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

### PRODUCT INFORMATION

Product Code	41667
Description	DWEQ650PAR361
ANSI Code	DWE
Standard Package	Case
Standard Package GTIN	10043168416679
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168416672