




GE
Lighting

10098 - F13T8/CW

GE Cool White Starcoat® T8

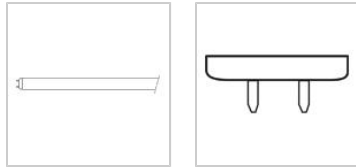

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

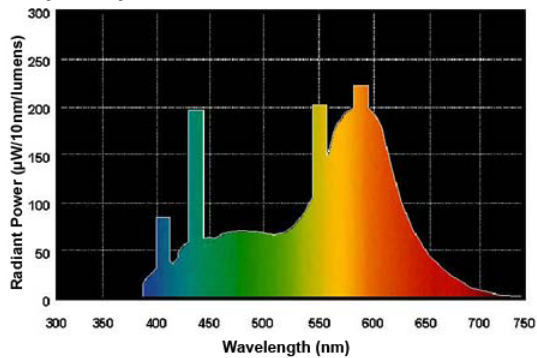

Graphs_Lamp Mortality

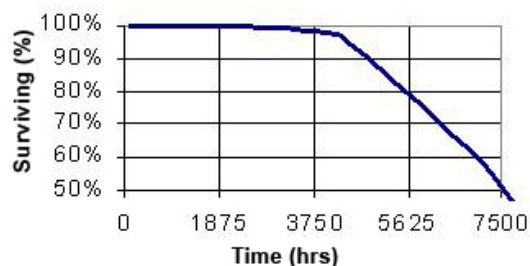

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	7500.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	18.0 mg
Picograms of Mercury (NOM)	5000.0 pg
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	565.0
Mean Lumens (NOM)	480.0
Nominal Initial Lumens per Watt (NOM)	43.46154
Color Temperature (NOM)	4100.0 K
Color Rendering Index (CRI) (NOM)	60.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	13.0
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	11.780 in(299.2 mm)
Minimum Overall Length (NOM)	11.670 in(296.4 mm)
Nominal Length (NOM)	12.000 in(304.8 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Face to End of Opposing Pin (B) (MIN)	11.400 in(289.6 mm)
Face to End of Opposing Pin (B) (MAX)	11.500 in(292.1 mm)

PRODUCT INFORMATION

Product Code	10098
Description	F13T8/CW
Standard Package	Case
Standard Package GTIN	10043168100981
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	24
Package	
UPC	043168100984