



GE
Lighting



17911 - F15T8/SP35

GE Starcoat® T8

- Passes TCLP, which can lower disposal costs.



High Color Rendering



CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

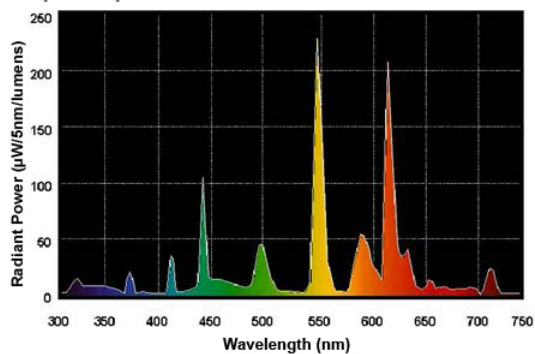

Graphs_Lamp Mortality

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T8
Rated Life (NOM)	7500.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	10.0 °C
Mercury Content (NOM)	18.0 mg
Picograms of Mercury (NOM)	2823.5 pg
Additional Info	TCLP compliant
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	940.0
Mean Lumens (NOM)	850.0
Nominal Initial Lumens per Watt (NOM)	62.66667
Color Temperature (NOM)	3500.0 K
Color Rendering Index (CRI) (NOM)	75.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	15.0
Open Circuit Voltage (rapid start) (MAX)	220.0 V
Open Circuit Voltage (after preheating) Max @ Temperature	210 V @ 10 °C
Open Circuit Voltage (rapid start) Min @ Temperature	157 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Open Circuit Voltage (after preheating) Min @ Temperature	108 V @ 10 °C
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	18.000 in(457.2 mm)
Minimum Overall Length (NOM)	17.670 in(448.8 mm)
Nominal Length (NOM)	18.000 in(457.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA) (NOM)	1.000 in(25.4 mm)
Max Base Face to Base Face (A) (NOM)	17.220 in(437.4 mm)
Face to End of Opposing Pin (B) (MIN)	17.400 in(442.0 mm)
Face to End of Opposing Pin (B) (MAX)	17.500 in(444.5 mm)
End of Base Pin to End of Opposite Pin End (C) (NOM)	17.670 in(448.8 mm)

PRODUCT INFORMATION

Product Code	17911
Description	F15T8/SP35
ANSI Code	2009-1
Standard Package	Case
Standard Package GTIN	10043168179116
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168179119

