



T5 High Output

24W/841 Min Bipin T5 HO ALTO UNP

Philips T5 HO lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

Product data

• General Characteristics

System Description	High Output
Base	Miniature Bipin
Base Information	Green [Green Base]
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Rated Avg. Life	30000 hr
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	841 [CCT of 4100K]
Color Rendering Index	85 Ra8
Color Designation	Cool White
Color Temperature	4100 K
Luminous Flux EL	1700 Lm
25°C, Rated	
Luminous Flux EL	1700 Lm
25°C, Nominal	
Initial Lumens	1950 Lm
Lum Efficacy Rated	76 Lm/W
HF 25°C	

Lum Efficacy Rated	87 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Electrical Characteristics

Watts	24 W
Lamp Wattage EL	22.5 W
25°C, Rated	
Lamp Wattage EL	22.5 W
25°C, Nominal	
Lamp Wattage EL	22.5 W
35°C	
Lamp Voltage EL	77 V
25°C	
Lamp Voltage EL	75 V
35°C	
Lamp Current EL	0.295 A
25°C	

PHILIPS

T5 High Output

Lamp Current EL 0.300 A
35°C
Dimmable Yes

Insertion Length B 553.7 (min), 556.1 (max) mm
Overall Length C 563.2 (max) mm
Diameter D 17 (max) mm

• Environmental Characteristics

Energy Efficiency A
Label (EEL)
Mercury (Hg) 1.4 mg
Content

• Measuring Conditions

Calibration Current 0.300 A
HF Generator Rated 150 V
Voltage
Resistor 250 ohm

• Product Dimensions

Base Face to Base 549.0 (max) mm
Face A



• Product Data

Product number 290213
Full product name 24W/841 Min Bipin T5 HO ALTO UNP
Short product name 24W/841 Min Bipin T5 HO ALTO UNP
Pieces per Sku 1
eop_pck_cfg 40
Skus/Case 40
Bar code on pack 46677290214
Bar code on case 50046677290219
Logistics code(s) 927992184022
tpd_ilcos_cd FDH-24/40/1B-L/P-G5-16/1150
eop_net_weight_pp 54.000 gr

Dimensional drawing



24W/841 Min Bipin T5 HO ALTO UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO F24T5/841 HO Alto	549.0	553.7	556.1	563.2	17

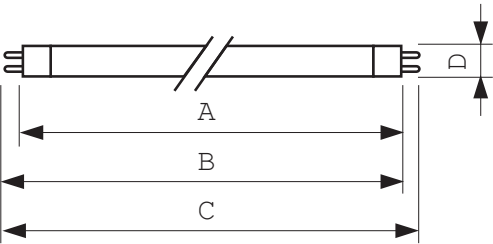

G5

Photometric data

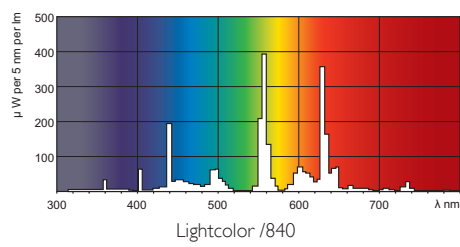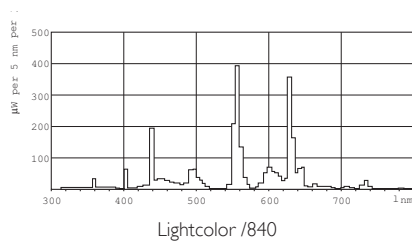

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 4
data subject to change