




GE
Lighting

41631 - 120PAR/H/FL30

GE PAR38

- Standard Halogen - Crisp, white light

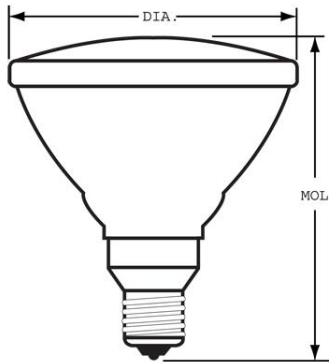

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp to cool before handling.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GENERAL CHARACTERISTICS

Lamp Type	Halogen - PAR
Bulb	PAR38
Base	Medium Skirt (E26/50x39)
Filament	CC-8
Rated Life (NOM)	2500.0 h
Primary Application	Indoor and outdoor Floodlight

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	1900.0
Center Beam Candlepower (CBCP) (NOM)	4000.0
Color Temperature (NOM)	2950.0 K
Beam Spread (NOM)	30.0 °
Nominal Initial Lumens per Watt (NOM)	15.83333

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	120.0
Voltage (NOM)	120.0
Burn Position	Universal burning position

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.313 in(135.0 mm)
Bulb Diameter (DIA) (NOM)	4.750 in(120.6 mm)

PRODUCT INFORMATION

Product Code	41631
Description	120PAR/H/FL30
Standard Package	Case
Standard Package GTIN	10043168416310
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168416313