





GE
Lighting

39112 - Q4632-12PK

GE Quartzline® PAR36 - Aircraft

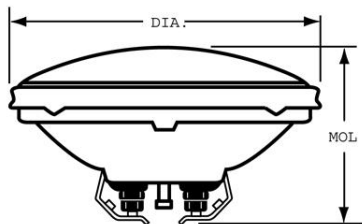

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	500.0 h
Primary Application	Aircraft

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	14.0 - 10.0 °
Beam Spread - Vertical	12.0 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	75000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	250.0
Voltage (NOM)	13.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	39112
Description	Q4632-12PK
ANSI Code	Q4632
Standard Package	Case
Standard Package GTIN	10043168391129
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168391122