



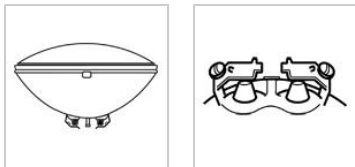

GE
Lighting

42552 - Q4559X-12PK

GE Quartzline® PAR64 - Aircraft; Very Narrow Spot

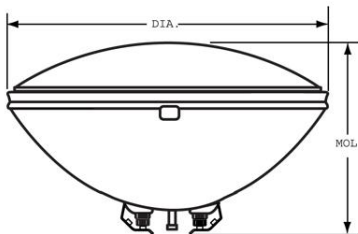

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp to cool before handling.
- Lamp may shatter and cause injury if broken
 - Dispose of lamp in a closed container.
 - Do not use lamp if outer glass is scratched or broken.

Warning

- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not use lamp if outer glass is scratched or broken.
 - Use in enclosed fixture rated for this product.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

NOTES

- Life Test Conditions: Cycled 20 minutes on, 20 off.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR64
Base	Screw Terminals
Filament	CC-6
Rated Life (NOM)	100.0 h
Primary Application	Aircraft; Very Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	11.0 - 10.0 °
Beam Spread - Vertical	7.5 - 10.0 °
Max. Beam Candlepower (MBCP) (MAX)	765000.0

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	600.0
Voltage (NOM)	28.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	3.750 in(95.2 mm)
Bulb Diameter (DIA) (NOM)	8.000 in(203.2 mm)

PRODUCT INFORMATION

Product Code	42552
Description	Q4559X-12PK
ANSI Code	Q4559X
Standard Package	Case
Standard Package GTIN	10043168425527
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168425520